

# Digital Waving Rotator

360° orbital waving rotator for efficient sample mixing with accurate speed control and easy angle adjustment



The Thermo Scientific™ Digital Waving Rotator is designed for ELISA, protein synthesis, gel staining and de-staining gels, antibody staining, and other time-sensitive applications.

### Key Features

- Digital speed and time displays
- Adjustable angle: 1° to 12°
- Speed range: 5 to 120rpm
- Speed control:
  - ≤30rpm: ±1rpm
  - >30rpm: ±2rpm
- Timer range: up to 99 hr. 59 min
- Capacity: 6 x 96-well plates
- Maximum load: 9.8kg (22 lb.)




Includes Dimpled Rubber Mat (88882102), Rubber Strips (88882103, 6/Pack).  
Use optional Rubber Mat (88882101) for plates, dishes, culture bottles, and bags.  
Warranty: 2 years | Certifications: CE

Digital Waving Rotator shown with Thermo Scientific™ Nunc™ Test Tubes on a Thermo Scientific Rubber Mat. Nunc Test Tubes sold separately.

| Product                | Electrical Requirements | Tray Dimensions                                | Overall Dimensions<br>D x W x H                 | Weight               | Plug Type      | Catalog Number  |
|------------------------|-------------------------|--|---|----------------------|----------------|-----------------|
| Digital Waving Rotator | 100 to 240V, 50/60Hz    | 31.6 x 27.6 x 1.9cm<br>(12.4 x 10.9 x 0.7 in.) | 38.3 x 29.5 x 22.4cm<br>(15.1 x 11.6 x 8.8 in.) | 13.5kg<br>(29.8 lb.) | 120V USUP      | <b>88882003</b> |
| Digital Waving Rotator |                         |  |   |                      | 230V EU/UK/CHN | <b>88882004</b> |

### Accessories

| Product and Description                            | Quantity | Catalog Number  |
|--|----------|-----------------|
| Rubber Mat, 32.2 x 28.2cm (12.7 x 11.1 in)         | Each     | <b>88882101</b> |
| Dimpled Rubber Mat, 32.2 x 28.2cm (12.7 x 11.1 in) | Each     | <b>88882102</b> |
| Rubber Strips                                      | 6/pack   | <b>88882103</b> |
| Replacement Rubber Tube                            | Each     | <b>88882128</b> |
| Screw for Rubber Strips                            | 8/Pack   | <b>88882129</b> |
| Power Adapter with US plug                         | Each     | <b>88870126</b> |
| Power Adapter with AUS/CN plug                     | Each     | <b>88870127</b> |
| Power Adapter with EU plug                         | Each     | <b>88870128</b> |
| Power Adapter with UK plug                         | Each     | <b>88870129</b> |

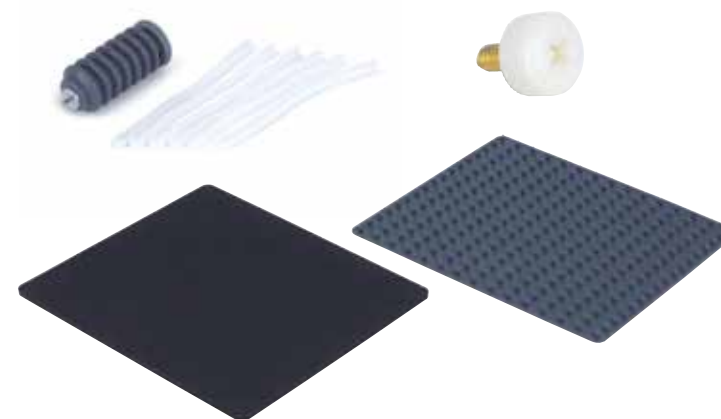

Waving Rotator accessories shown include: Replacement Rubber Tube and Rubber Strips (upper left), Screw for Rubber Strips (upper right), Rubber Mat and Dimpled Rubber Mat (lower left and right).